

## Technical Specifications

Version 1.2 July 2000

### MEASUREMENT MICROPHONE





### FEATURES

- ▲ Precise electret condenser measurement microphone
- ▲ Ultra-linear frequency response
- ▲ Well-balanced, true omni-directional pattern
- ▲ Optimally suited for room correction applications
- ▲ Phantom powered, +15 V to +48 V
- ▲ Rugged construction and sleek, modern design
- ▲ Microphone stand adapter and windscreen for outdoor measurement included
- ▲ Perfect for use with the ULTRA-CURVE DSP8000 / ULTRA-CURVE PRO DSP8024 or any other real-time analyzer
- ▲ Manufactured under the BEHRINGER quality control

### SPECIFICATIONS

Type	electret condenser, omni-directional
Impedance	600 Ohms
Sensitivity	-60 dB
Frequency response	15 Hz to 20 kHz
Connector	gold-plated XLR
Phantom power	+15 V to +48 V
Weight	app. 120 g

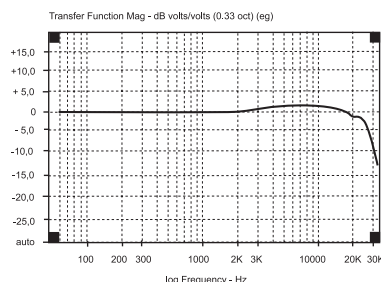

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

The information contained in this sheet is subject to change without notice. No part of this sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER and ULTRA-CURVE are registered trademarks. ALL RIGHTS RESERVED.

© 2000 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Müncheide II, Germany  
Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30



[www.behringer.com](http://www.behringer.com)