


BIK-433

MOTORBIKE INTERCOM BOX

Lafayette



User's manual

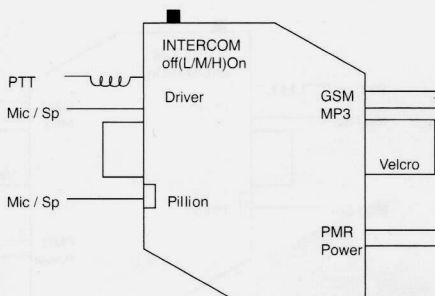

1. Installation

- 1) Fix the Intercom by using Velcro Tape
- 2) Power: Connect power cable to the power source

2. Operating

- 1) Using the MP3 only:
 - Turn the power Intercom switch "Off".
 - Note: there is no interference caused by Intercom or transceiver or GSM.
- 2) Using the Intercom: Intercom switch should be Low or Mid or High
 - Intercom Switch "L": Using it loud place
 - Intercom Switch "H": Using it silent place
- 3) Using the Intercom + MP3
 - Normal condition: Listening music thorough MP3
 - Using the Intercom
 - During using Intercom, MP3 is mute, which will be replayed within 3 seconds automatically after finishing communication with Intercom
- 4) Using the Intercom + MP3 + transceiver (or GSM)
 - Normal condition: Listening music thorough MP3
 - Using the Intercom or the transceiver (or the GSM)
 - During using the Intercom (or transceiver or GSM), MP3 is mute, which will be replayed within 3 seconds automatically after finishing communication with Intercom (or transceiver or GSM)
- 5) Using the transceiver
 - The Driver can have a communication with other party by pressing PTT Button of Transceiver.
 - The Pillion can listen the voice from the other party.
 - When the PMR is using, MP3 is mute

6) Using the GSM

- Only Driver can listen the voice from the other party.
- The Pillion can listen the voice of Driver
- When the GSM is using, MP3 is mute

*MUTE of MP3

- When other function such as Intercom (or transceiver or GSM) is using, MP3 is mute
- MP3 will be replayed within 3 seconds automatically after finishing communication with other function.

3. Specification

- 1) Power Resource: 12Volt
- 2) Audio Output Power: 50 mW / 25 Ohms
- 3) Power Consumption: 25mA Max
- 4) Intercom Level: Increasing 5db per L / M / H

Note: this equipment does not be water proofed. Please do not use it in moist area.